

Superb Operability

Smart & Slim

The head unit incorporates all required optical functions as well as enabling a smart, slim and compact design. Smooth and comfortable measurement is possible without exposing patients to any feeling of pressure.



FULL SPEC MODEL

- Largest lens measurement range
- 21-Point Eye Exam measurable
- Auto cross cylinder

Near-point Chart

A near-point chart for presbyopic eyes can be attached to DR-900.



LED Illumination


The DR-900 incorporates LED illumination in the head unit, which illuminates the near-point chart and allows measurement in dark places.



Connective Relay BOX



Transformers to connect the head unit, control unit and power supply are integrated in a compact box. Cables are neatly fitted by placing connectors on the same side, even when the refractor is used with a refractometer and a lensmeter.

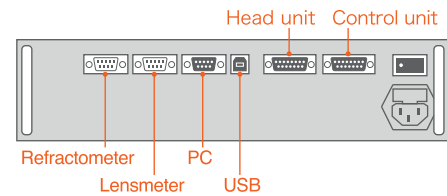

Human-Interface Design

Digital Ref-Ractor DR-900


SPECIFICATION

SPHERICAL POWER	Measurement range	-28.75D to +27.25D	
	Measurement unit	0.12D, 0.25D, 0.50D, 1.00D	
	Measurement range	0D to ±6.00D	
CYLINDRICAL POWER	Measurement unit	0.25D, 1.00D	
	Measurement range	0° to 180°	
AXIS	Measurement unit	1°, 5°	
	Measurement range	48.0mm to 80.0mm	
INTERPUPILLARY DISTANCE	Measurement unit	0.5mm, 1mm	
	Measurement range	0Δ to 20 Δ	
PRISM DEGREE	Measurement unit	0.1Δ, 0.5Δ, 1Δ	
	Measurement range	0° to 360°	
PRISM ANGLE	Measurement unit	1°, 5°	
	Measurement range	12, 13.75, 16, 18mm	
VERTEX DISTANCE	Measurement range	Auto cross cylinder (±0.25D) ±0.25D cross cylinder, ±0.50D cross cylinder	
	Measurement unit		
CROSS CYLINDER	Measurement range	P.D., occluder, foraminous board (φ1mm), polarization filter (45°/135°), Red Maddox (right eye : horizon, left eye : vertical), R/G filter (right eye : red filter, left eye : green filter), dispersing prism (right eye : 6ΔBU, left eye : 10ΔBI), lenses for retinoscope (+1.50D/+2.00D)	
	Measurement unit		
AUXILIARY LENS	Measurement range	Thermal line printer with an automatic cutter	
	Measurement unit	10.4 inch LCD monitor	
PRINTER MONITOR	Measurement range	Head	385 to 417mm (W) × 112mm (D) × 308mm (H)
	Measurement unit	Controller	272mm (W) × 272mm (D) × 204mm (H)
	Measurement range	Relay box	326mm (W) × 119mm (D) × 83mm (H)
EXTERNAL DIMENSIONS	Measurement unit	Head	Approximately 5.3kg
	Measurement range	Controller	Approximately 2.5kg
	Measurement unit	Relay box	Approximately 2.4kg
WEIGHT	Measurement range	AC100 to 240V, 50/60Hz	
	Measurement unit		
RATED SUPPLY	Measurement range	90VA	
POWER CONSUMPTION	Measurement unit		

STANDARD ACCESSORIES

- Communication cable
- Power cord
- Printer paper
- Fuse
- Near point chart
- Near point holder
- Near point chart bar
- Dust cover
- Operation manual

A total optometry system is available by combining a Auto Ref / Ref-keratometer, a lensmeter and a chart.

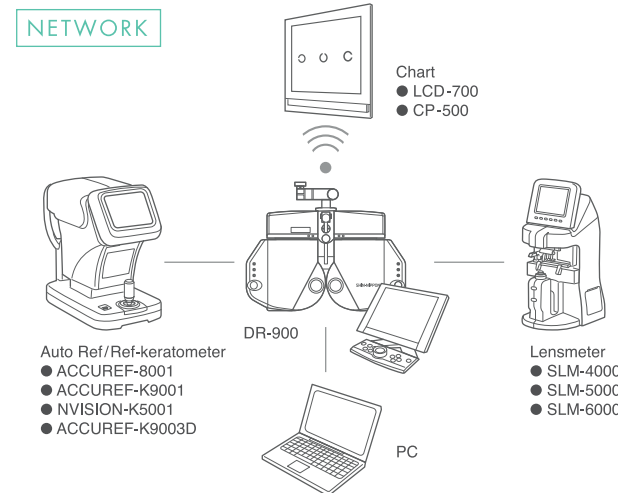

Design and specifications are subject to change without notice.

Manufacturer

Rexxam
Rexxam Co.,Ltd.

Kagawa factory
958, Ikeuchi, Konan-cho,
Takamatsu, Kagawa 761-1494, Japan

Contact

MEC Sales Division
2-8-4, Kandatsukasa-machi, Chiyoda-ku
Tokyo, 101-0048, Japan
TEL 81-3-3256-7701 FAX 81-3-3256-7702
E-mail: eye@rexam.co.jp
URL: <http://www.rexxam.co.jp>
URL: <http://www.shin-nippon.jp>

Distributed by



Management System
ISO 9001:2008
ISO 13485:2003
www.rexxam.co.jp
ID: 0910589071



A Human-Interface Design
pursuing Ultimate Operability

Human-Interface Design

Digital Ref-Ractor DR-900

Official Distributor

optohellas
ΟΦΘΑΛΜΟΛΟΓΙΚΑ ΜΗΧΑΝΗΜΑΤΑ

An Interface Design Realizing Smooth Communication and Speedy,Smooth & Silent


Superb Operability

Simple & Easy Operation

High quality and ultra-reliable optical parts allow faster, smoother and quieter measurement through the high-precision mechanism design, featuring a sequential-control lens rotating unit. This refractor is based on a human-interface design, prioritizing user-friendliness e.g. by focusing on operation "noise".


High-speed Silent Head

With a high-precision optical mechanism installed in the head unit. Achieving unrivalled speed and smooth and noiseless motion, lets you measure patients instantly without tiring them out.

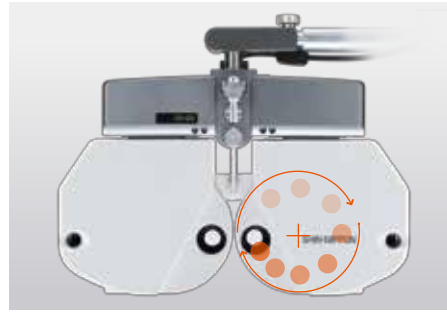

Wide Field of View

The head unit was designed to be as slim as possible, based on the layout and tuning of the lens unit and retaining the lens diameter. This achieves a brighter and wider field of view (40°).



"New Generation" SHIN-NIPPON DESIGN & STYLE

Sophisticated detail and quality. A stylish form and color that match various spaces. Classy two-tone metallic & pearl coating, combined with a sharp design, which also features smooth curves, reflects its high quality and reliability for users.

New DESIGN& STYLE



Detachable Face Panel

Soft and light materials and shapes are used for the parts exposed to patients' forehead and cheeks. These are also easily detachable and the head unit can be kept clean.



Equipped with an IR unit.

Can also interface with charts via infrared communication.



Touch panel

10.4 inch large LCD color display


Easy and "Intuitive" Operation!

Keyboard panel

Jog dial & Operation buttons


Jog Dial/Operation Buttons

A jog dial integrating a dial and Enter key allows the direct selection of "Select", "Adjust" and "Enter" functions. The jog dial/buttons have shapes and touch that enable touch typing and focus on the operational feeling in every detail.

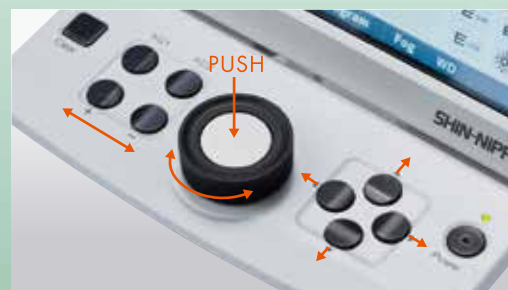

Free measurement position

The touch panel can be tilted up to 80 degrees. You can measure comfortably whether standing or sitting. The keyboard panel is designed to be slim to avoid interfering with operation.

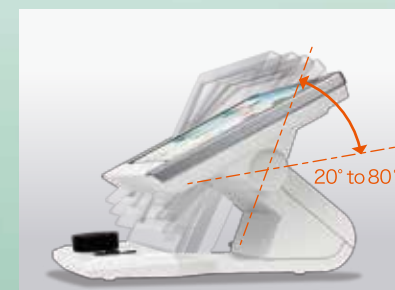

Compact Body / Printer with an automatic cutter

The printer is placed on a rear surface to enable a compact and space-saving design. Paper is easily replaced by inserting new rolls into the printer.



Wide and easily-operable touch buttons



A jog dial & buttons allow centered operation.


Multi Interface Design

The operation screen of the LCD touch panel has a user-friendly layout and color plan and designed to divide the screen into three display areas to organize information. A series of operations from "Setup" → "Measure" → "Display" check can be implemented "intuitively" and "sensuously".



Basic Display

The part currently selected is displayed in orange.

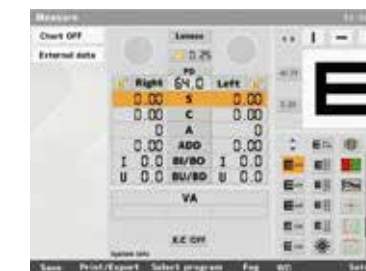


Screen Input

Number input is available by displaying the numeric panel on screen, which facilitates changing large numbers.



Interface Display

This information is displayed on the left side when the device is interfaced with a PC, refractometer, and lensmeter.

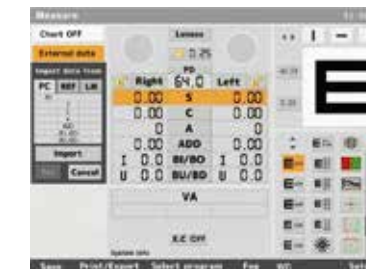

Memory Function

A memory function capable of saving several types of measurement data. This is useful when measuring patients who use multiple pairs of glasses.

